

服 务 热 线
021-60832839/13621925718
Website: www.shairbuild.com Email: info@shairbuild.com

卓颖机械（上海）有限公司
地址: 上海市浦东新区川沙路1098号
邮编: 201499
网址: www.sh-joymachinery.com
www.shairbuild.com
邮箱: info@shairbuild.com
电话: 0086 21 60832839

JOY MACHINERY (SHANGHAI) CO.,LTD.
ADD: No.1098, Chuansha Road, Pudong District, Shanghai, China.
Postal code: 201499
Website: www.sh-joymachinery.com
www.shairbuild.com
E-mail: info@shairbuild.com
Tel：0086 21 60832839

2026 Version

卓颖机械（上海）有限公司
JOY MACHINERY (SHANGHAI) CO.,LTD.

卓颖机械 产品样册
PRODUCTS CATALOGUE





目录 CONTENTS

公司介绍 CORPORATION PROFILE.....2

活塞空压机 PISTON AIR COMPRESSORS

D 系列活塞式空压机 D Series Piston Air Compressor.....3
A 系列活塞式空压机 A Series Piston Air Compressor.....4
S 系列活塞式空压机 S Series Piston Air Compressor.....5
动力用系列活塞式空压机 Power Series Piston Air Compressor.....6
中压系列活塞式空压机 Medium Pressure Series Piston Air Compressor.....7
全无油系列活塞式空压机 Oil-free Series Piston Air Compressor.....8
增压机 Booster Air Compressor 9

压缩空气净化系统图 Compressed Air Purified System.....10



公司简介 COMPANY PROFILE

卓颖机械（上海）有限公司是一家专注于空气压缩机的专业化企业，致力于为客户提供稳定、节能、 高效、智能化的压缩空气解决方案为己任，让全球用户享受卓颖产品带来的不一样的美好体验。

卓颖生产管理严格遵循 ISO9001 国际质量体系，可提供全面的智能空压机产品，包括但不限于：低于、常压、高压螺杆空压机、永磁变频双级压缩空压机、无油空压机、移动空压机、后处理设备。产品广泛应用于机械制造、食品医药、石油化工等领域。公司本着“客户的满意就是我们矢志不渝的追求”的企业理念，产品出口亚洲、欧洲、美洲、非洲等国家和地区，获得良好的市场口碑。

“卓而不凡，颖领科技”——卓颖机械（上海）有限公司欢迎各界惠顾，让我们共同携手，共创美好未来！

JOY MACHINERY (SHANGHAI) CO., LTD. specializes in air compressors, committed to providing customers with stable, energy-saving, efficient and intelligent compressed air solutions, offering global users to enjoy the unique and beautiful experience of JOY MACHINERY products.

JOY MACHINERY strictly follows the ISO9001 international quality system and can provide a comprehensive range of intelligent air compressor products, including but not limited to: low-pressure, normal pressure, high-pressure screw air compressors, permanent magnet variable frequency two-stage compression air compressors, oil-free air compressors, mobile air compressors, and post-treatment equipment. The product is widely used in fields such as mechanical manufacturing, food and medicine, and petrochemicals etc. The company adheres to the corporate philosophy of "customer satisfaction is our unwavering pursuit", our products are exported to countries and regions such as Asia, Europe, America, Africa, etc., gaining a good market reputation.

JOY MACHINERY (SHANGHAI) CO., LTD. welcomes customers from all walks of life to join hands and create a better future together, with the slogan "Extraordinary quality, Leading Technology"!



D 系列活塞式空压机 D SERIES PISTON AIR COMPRESSOR

品质卓越，性能稳定，是各行业首

Excellent quality and stable performance, the first choice in all kinds of industries.




规格参数表 Technical Parameters 卓颖机械（上海）有限公司 JOY MACHIERY (SHANGHAI) CO.,LTD.

Model	Power	Capacity	Pressure	RPM	Cylinder Bore/Number	Size	Weight
	KW/HP	m^3/min	Mpa	R/min	Diameter/PCS	L×W×H	KG
AV1608	1.5/2.2	0.16	0.8	1250	Φ51*2	980*400*770	85
AV2508	2.2/3.0	0.25	0.8	1170	Φ65*2	1100*420*810	109
AV3608	3.0/4.0	0.36	0.8	1000	Φ65*3	1200*450*860	137
AV4008	4.0/5.5	0.40	0.8	1000	Φ80*2	1330*460*990	179
AW6708	5.5/7.5	0.67	0.8	1080	Φ80*3	1480*540*1050	237
AW9008	7.5/10	0.90	0.8	1060	Φ90*3	1600*560*1100	291
AW15008	11/15	1.50	0.8	900	Φ100*3	1710*700*1230	420
AW19008	15/20	1.90	0.8	920	Φ120*3	1800*720*1340	587
AW30012	3/4	0.30	1.2	1000	Φ65*2/Φ51*1	1200*450*860	135
AW60012	5.5/7.5	0.60	1.2	1000	Φ65*2/Φ51*1	1480*540*1050	232
AW80012	7.5/10	0.80	1.2	830	Φ100*2/Φ80*1	1640*560*1140	359
AW100012	11/15	1.00	1.2	900	Φ100*2/Φ80*1	1710*700*1230	415
AW20012	2.2/3	0.20	1.2	900	Φ65*2/Φ51*1	1200*450*860	127
AW40012	4/5	0.40	1.2	900	Φ80*2/Φ65*1	1480*540*1050	219

A 系列活塞式空压机 A SERIES PISTON AIR COMPRESSOR

性能可靠—世界级的品质，该产品具有重负荷、低转速、耐长时间运转等特点。

Reliable performance, world-class quality, the product has the characteristics of heavy load, low speed, long time running.

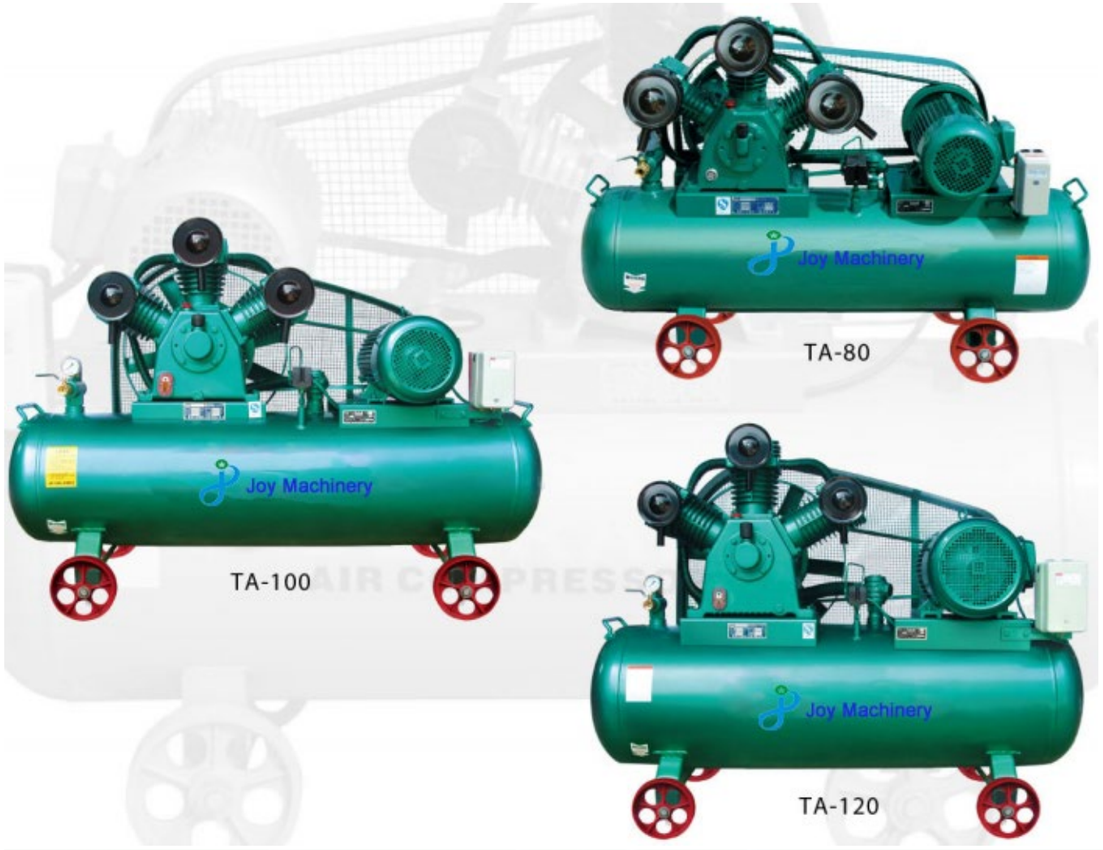


规格参数表 Technical Parameters 卓颖机械（上海）有限公司 JOY MACHIERY (SHANGHAI) CO.,LTD.

Model	Power	Capacity	Pressure	RPM	Cylinder Bore/Number	Storage	Size	Weight
	KW/HP	m^3/min	Mpa	R/min	Diameter/PCS	m^3	L×W×H	KG
TA-65	1.5/2.0	0.17	0.7	635	Φ65*3	0.07	1050*390*770	107
VA-80	3.0/4.0	0.36	0.7	950	Φ80*2	0.08	1234*470*880	156
TA-80	4.0/5.5	0.53	0.7	875	Φ80*3	0.18	1370*540*1000	208
VA-100	5.5/7.5	0.67	0.7	950	Φ100*2	0.17	1482*590*1100	265
TA-100	7.5/10	1.00	0.7	900	Φ100*3	0.23	1560*620*1240	360
TA-120	11/15	1.50	0.7	800	Φ120*3	0.30	1640*670*1420	491
TA-120H	15/20	2.00	0.7	800	Φ120*3	0.32	1710*760*1280	480
HTA-65	1.5/2.0	0.18	1.25	800	Φ65*2/Φ51*1	0.07	1050*390*770	122
HTA-65H	2.2/3.0	0.22	1.25	950	Φ65*2/Φ51*1	0.08	1165*400*775	133
HTA-80	4/5	0.45	1.25	950	Φ80*2/Φ65*1	0.13	1325*490*970	223
HTA-100	5.5/7.5	0.65	1.25	750	Φ100*2/Φ80*1	0.18	1490*590*1130	344
HTA-100H	7.5/10	0.84	1.25	990	Φ100*2/Φ80*1	0.23	1505*810*1175	379
HTA-120	11/15	1.22	1.25	860	Φ120*2/Φ100*1	0.25	1685*660*1250	494

S 系列活塞式空压机 S SERIES PISTON AIR COMPRESSOR

该产品是节能型、系列化、零件通用性极强的风冷移动式空气压缩机，且操作维护方便。

The product is energy-saving, serialized, Air cooling portable air compressor with strong universality of parts, operation Maintenance is convenient.

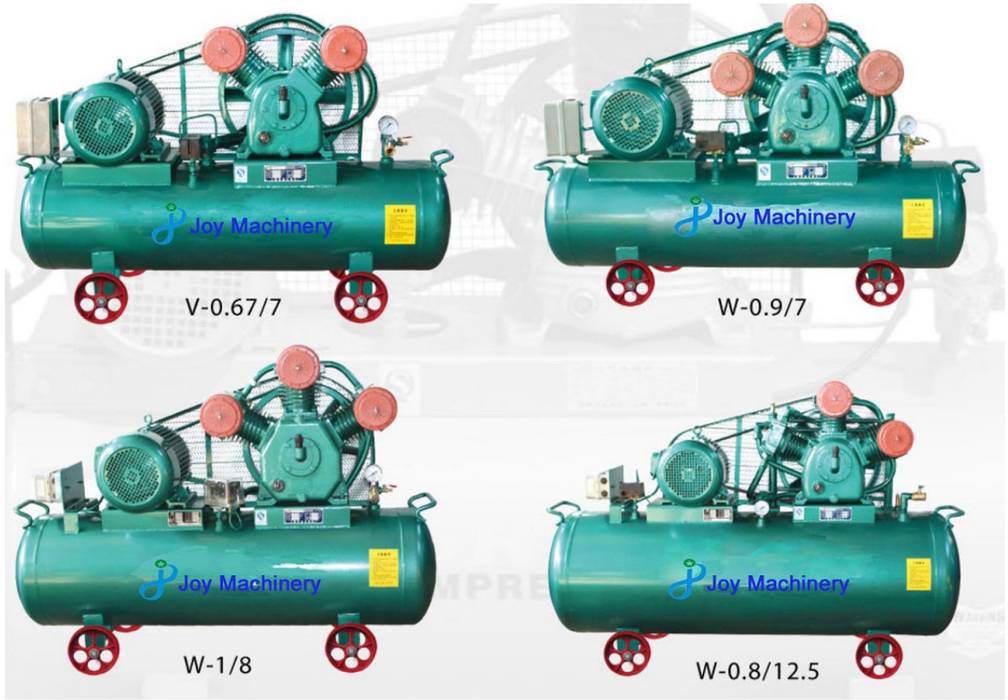

规格参数表 Technical Parameters 卓颖机械（上海）有限公司 JOY MACHIERY (SHANGHAI) CO.,LTD.

Model	Power	Capacity	Pressure	RPM	Storage	Size	Weight
	KW/HP	m^3/min	Mpa	R/min	m^3	L×W×H	KG
V-0.13/12.5	1.5/2.0	0.13	1.25	1200	0.064	965*380*720	76
V-0.14/10	1.5/2.0	0.14	1.00	800	0.064	965*380*720	73
V-0.17/7	1.5/2.0	0.17	0.70	965	0.064	965*380*720	73
W-0.21/10	2.2/3.0	0.21	1.00	820	0.064	965*380*720	97
W-0.25/7	2.2/3.0	0.25	0.70	965	0.064	965*380*720	97
V-0.3/10	3.0/4.0	0.30	1.00	750	0.125	1340*490*920	190
V-0.36/7	3.0/4.0	0.36	0.70	830	0.125	1340*490*920	190
V-0.4/10	4.0/5.0	0.40	1.00	990	0.125	1340*490*920	190
V-0.6/10	5.5/7.5	0.60	1.00	990	0.125	1340*490*920	245
V-0.67/7	5.5/7.5	0.67	0.70	990	0.125	1340*490*920	230
W-0.74/14	7.5/10	0.74	1.40	990	0.320	1790*530*1100	255
W-0.8/12.5	7.5/10	0.80	1.25	1050	0.320	1790*530*1100	330
W-0.9/7	7.5/10	0.90	0.70	880	0.170	1420*530*1100	250
W-0.9/10	7.5/10	0.90	1.00	1180	0.170	1420*530*1100	255
W-1/8	7.5/10	1.00	0.80	870	0.170	1420*530*1000	250
W-1.5/8	11/15	1.50	0.80	700	0.200	1520*700*980	480
W-2/8	15/20	2.00	0.80	860	0.200	1700*700*1000	520

动力系列活塞式空压机 POWER SERIES PISTON AIR COMPRESSOR

具有耗功少、寿命长、使用可靠、操作维护简便等特点；广泛用于冶金、机械制造、纺织、化工、仪表、食品、制药等领域。

With less power consumption, long life and reliability, easy operation and maintenance.

Widely used in metallurgy, machinery manufacturing, textiles, chemicals, instruments, food, pharmaceutical and other industry fields.




规格参数表 Technical Parameters 卓颖机械（上海）有限公司 JOY MACHIERY (SHANGHAI) CO.,LTD.

Model	Power	Capacity	Pressure	RPM	Storage	Size	Weight
	KW/HP	m^3/min	Mpa	R/min	m^3	L×W×H	KG
V-0.8/12.5	7.5/10	0.80	1.25	730	0.32	1650*560*1220	400
V-1.05/10	7.5/10	1.05	1.00	860	0.32	1650*560*1220	400
V-1.05/12.5K	7.5/10	1.05	1.25	860	0.32	1650*560*1220	400
V-1.2/10	11/15	1.20	1.00	1000	0.32	1650*560*1220	530
Z-1.6/10	11/15	1.60	1.00	830	0.20	1600*794*1329	530
V-3/7	18.5/25	3.00	0.70	980	0.30	1470*1180*1270	960
VF-3/7	22/30	3.00	0.70	980	0.30	1668*1140*1230	1240
V-3/10	22/30	3.00	1.00	980	0.30	1470*1180*1270	1160
V-6/7	37/50	6.00	0.70	980	0.60	1750*1200*1310	1280
VF-6/7	37/50	6.00	0.70	980	0.60	2090*1400*1230	1400
3L-10/8	65/87	10.00	0.80	490	1.0	1877*885*1822	1700
L-11/7	65/87	10.00	0.80	490	1.0	1877*885*1822	1700

中压系列活塞式空压机 MEDIUM PRESSURE SERIES PISTON AIR COMPRESSOR

专为 PET 吹瓶机行业设计。压力强大、气源稳定、可靠性好，使用寿命长等特点。
Specifically design for PET blowing industry, strong pressure, air delivery stable and long lifetime, etc.

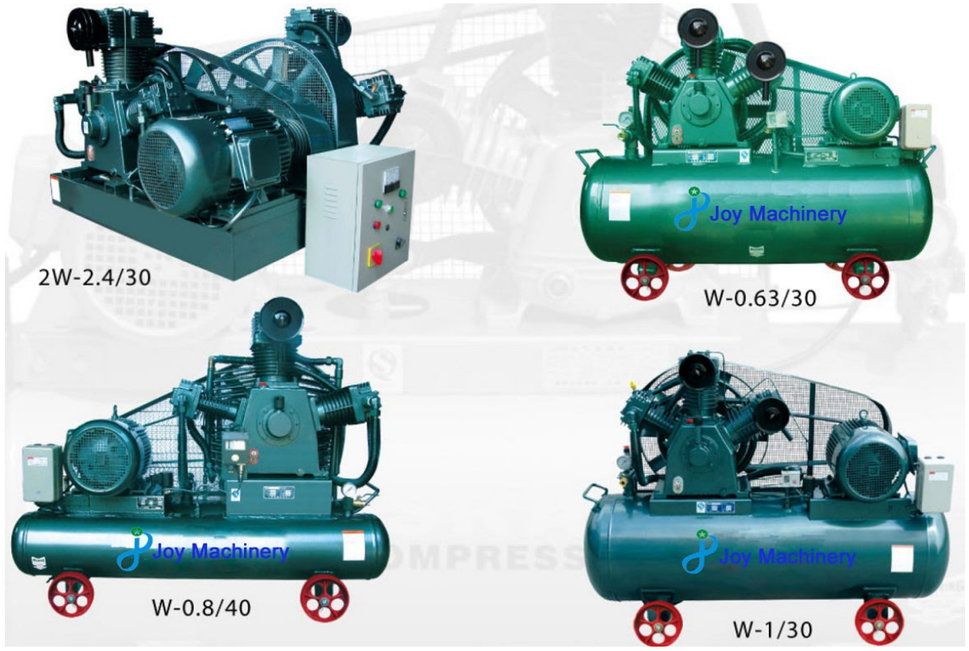

规格参数表 Technical Parameters 卓颖机械（上海）有限公司 JOY MACHIERY (SHANGHAI) CO.,LTD.

Model	Power	Capacity	Pressure	RPM	Size	Weight
	KW/HP	m^3/min	Mpa	R/min	L×W×H	KG
W-0.5/30	7.5/10	0.50	3.0	730	1470*530*1020	290
W-0.6/20	7.5/10	0.60	2.0	860	1470*530*1020	290
W-0.6/25	7.5/10	0.60	2.5	860	1470*530*1020	290
W-0.63/30	7.5/10	0.63	3.0	800	1490*600*1160	430
W-0.7/25	7.5/10	0.70	2.5	880	1490*600*1160	430
W-0.8/20	7.5/10	0.80	2.0	980	1490*600*1160	430
W-0.8/40	15/20	0.80	4.0	760	1620*730*1320	520
W-0.6/60	11/15	0.60	6.0	660	1620*730*1320	520
W-1/30	11/15	1.00	3.0	800	1790*530*1200	530
W-1/40	15/20	1.00	4.0	820	1660*800*1360	560
W-1.2/25	11/15	1.20	2.5	880	1790*530*1200	530
W-1.2/30	15/20	1.20	3.0	800	1800*750*1400	600
W-1.2/60	2*11/2*15	1.20	6.0	660	1600*1300*2200	580
W-1.6/30	7.5/11	1.60	3.0	800	1600*1300*2200	580
2W-1.6/40	2*11/2*15	1.60	4.0	760	1600*1300*2200	580
2W-2/30	2*11/2*15	2.00	3.0	800	1300*1100*850	580
2W-2/40	2*15/2*20	2.00	4.0	820	2000*900*1700	1200
2W-2.4/25	2*11/2*15	2.40	2.5	880	1300*1100*850	580
2W-2.4/30	2*15/2*20	2.40	3.0	800	1400*1200*950	600
4W-4/30	4*11/4*15	4.00	3.0	800	1850*1650*1450	2000

全无油系列活塞式空压机 OIL-FREE SERIES PISTON AIR COMPRESSOR

针对于气源领域纯净和环境要求较高的场合而设计，其所有的摩擦副均不采用稀油润滑（运动部件采用油脂润滑和自润滑材料），因此排出的压缩空气中不含油及油蒸汽。
Design for pure air application and high required condition, no lubricant oil is required for the running parts (the grease lubrication and self-lubricated materials are used for running parts), so compressed air is free of oil and oil vapour.



规格参数表 Technical Parameters 卓颖机械（上海）有限公司 JOY MACHIERY (SHANGHAI) CO.,LTD.

Model	Power	Capacity	Pressure	RPM	Size	Weight
	KW/HP	m^3/min	Mpa	R/min	L×W×H	KG
ZW-0.24/7	2.2/3	0.24	0.70	950	1140*400*900	160
ZW-0.3/7	3/4	0.30	0.70	950	1140*400*900	160
VW-0.45/7	4/5.2	0.45	0.70	920	1300*460*960	240
VW-0.6/7	5.5/7.5	0.60	0.70	950	1300*460*960	260
WW-0.5/14	5.5/7.5	0.50	1.40	670	1450*500*1100	340
WW-0.6/10	5.5/7.5	0.60	1.00	740	1450*500*1100	320
WW-0.7/12.5	7.5/10	0.70	1.25	740	1450*500*1100	340
WW-0.9/7	7.5/10	0.90	0.70	810	1450*500*1100	350
WW-0.9/10	7.5/10	0.90	1.00	810	1450*500*1100	350
WW-1.25/7	11/15	1.25	0.70	820	1600*650*1200	460
WW-1.25/10	11/15	1.25	1.00	820	1600*650*1200	460
WW-1.5/7	11/15	1.50	0.70	820	1680*500*1250	460
WW-1.8/7	2*7.5/2*15	1.80	0.70	810	1980*1290*1520	720
WW-1.8/10	2*7.5/2*15	1.80	1.00	810	1980*1290*1520	720
WW-1.4/12.5	2*7.5/2*15	1.40	1.25	740	1980*1290*1520	720
WW-2.5/7	2*11/2*15	2.50	0.70	820	1980*1290*1620	720
WW-2.5/10	2*11/2*15	2.50	1.00	820	1980*1290*1620	760
WW-3.0/7	2*11/2*15	3.00	0.70	860	1980*1290*1620	760
WW-3.0/10	2*11/2*15	3.00	1.00	860	1980*1290*1620	760

增压机(7.5-45KW)

Booster Air Compressor (7.5-45KW)



增压机系列是大排量中压系统的最佳选择，产品性能稳定、可靠，可将0.8-1.0MPa 的压力增压至 3.0-6.0MPa.

Booster series is the best choice of large displacement medium pressure system, product performance is stable, reliable, can be pressurized to 3.0-6.0MPa from 0.8-1.0MPa pressure.

规格参数表 Technical Parameters 卓颖机械（上海）有限公司 JOY MACHIERY (SHANGHAI) CO.,LTD.

型号 Model	低压进气量 Low Pressure Inlet Air Delivery, m3/min	高压排气量 Air Delivery m3/min	进气压力 Inlet Pressure Mpa	排气压力 Discharge Pressure, Mpa	电机功率 Power KW	转速 RPM
JMB-2/30	2.2	2.0	0.7	3.0	7.5	800
JMB-2.4/35	2.8	2.4	0.9	3.5	11	800
JMB-3.5/40	4.0	4.0	1.0	4.0	18.5	800
JMB-3.0/30	3.5	3.0	0.7	3.0	15	800
JMB-4.0/35	4.5	4.0	0.9	3.5	18.5	800
JMB-4.0/40	4.5	4.0	1.0	4.0	18.5	800
JMB-5.0/30	5.6	5.0	0.7	3.0	18.5	800
JMB-6.0/35	7.0	6.0	0.9	3.5	22	800
JMB-6.0/40	7.0	6.0	1.0	4.0	22	800
JMB-7.0/40	8.0	7.0	1.0	4.0	25	800
JMB-8.0/40	9.0	8.0	1.0	4.0	30	780
JMB-9.0/40	10.0	9.0	1.0	4.0	37	820
JMB-11/40	12.0	11.0	1.0	4.0	45	870

















用户现场 (User's Local Spot)

空压机系统常用配置图

Common configuration of air compressor system

